


RFP Series

RotaFlo® Flow Meter

- ✓ Quick Visual Flow Indication
- ✓ Dual Scale
- ✓ Easy Installation
- ✓ NPT Connections
- ✓ SS Flow Components
- ✓ ½" - 2" Size Range

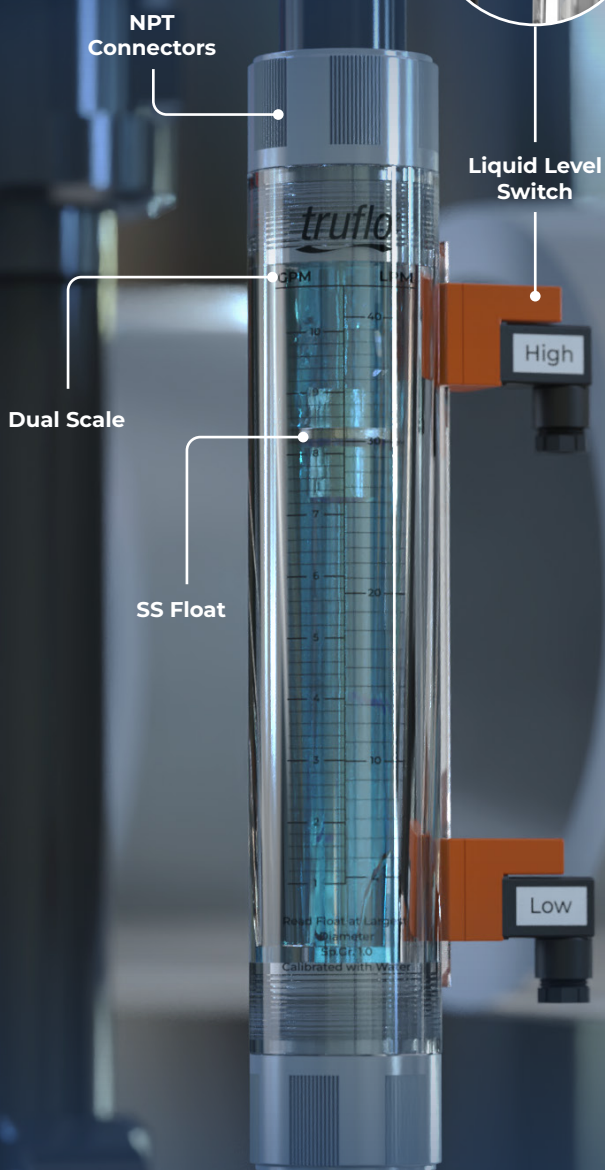

The **RFP RotaFlo®** Series flow meter provides exceptional accuracy and long term local indication of measured liquid media.

The RotaFlo® comprises a SS guide rod and a dual scale for clear visibility. The large tapered float provides stability and consistent flow indication throughout the entire range.

Technical Specifications


Plastic Wetted Material	Acrylic FPM PVC
Metal Wetted Material	SS
Accuracy	±4 F.S.
Scale	GPM LPM
Connection	NPT
Standards & Approvals	CE RoHS Compliant

Technical Parameters

Model	Measure Range		End Connector	Accuracy	Size (mm)			
	GPM	LPM			A	B	C	D
RFP-15011	0.1 ~ 1	0.4 ~ 4	½" MNPT FNPT*	±4%	235	233	180	Ø32
RFP-15022	0.2 ~ 2	1 ~ 7						
RFP-15033	0.3 ~ 3	1 ~ 11						
RFP-15055	0.5 ~ 5	1.8 ~ 18						
RFP-20110	1 ~ 10	4 ~ 40	1 ¼" NPT	±4%	330	283	236	Ø45
RFP-20220	2 ~ 20	10 ~ 70						
RFP-20535	5 ~ 35	20 ~ 140						
RFP-25110	1 ~ 10	4 ~ 40	1 ½" NPT	±4%	319	297	235	Ø51
RFP-25220	2 ~ 20	10 ~ 70						
RFP-25330	3 ~ 30	10 ~ 110						
RFP-25535	5 ~ 35	20 ~ 140						
RFP-2550	5 ~ 50	25 ~ 190						
RFP-40440	4 ~ 40	15 ~ 150	1 ½" FNPT	±4%	340	302	240	Ø65
RFP-40660	6 ~ 60	22 ~ 220						
RFP-4015100	15 ~ 100	50 ~ 400						
RFP-5020100	20 ~ 100	100 ~ 350	2" NPT	±4%	400	367	294	Ø75
RFP-5040100	40 ~ 150	150 ~ 550						
RFP-5060200	60 ~ 200	150 ~ 750						

*FNPT = Standard

Female Thread Structure Chart



Male Thread Structure Chart

Precision and Clarity
For Reliable, Long-Term
Liquid Monitoring

